



ASSEMBLY

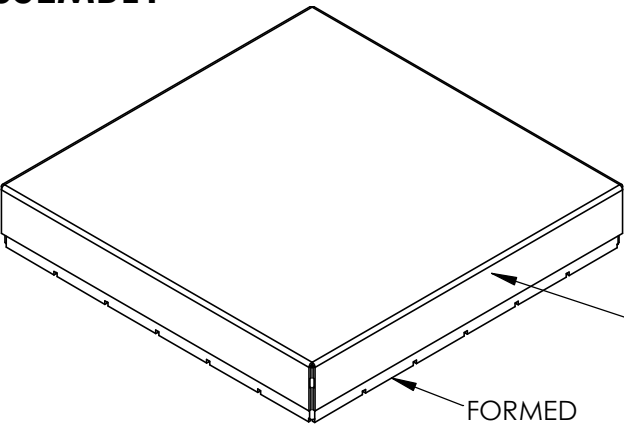


FORMED
EZ-LOC FENCE
GRVF-0250SC-012000

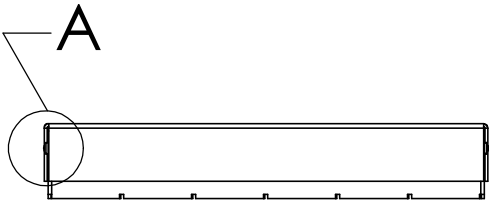


EZ-LOC COVER
GRVC-1500S1500-0200X

DETAIL A
SCALE 8 : 1


ETCHED CHANNEL
INSIDE COVER
ENGAGES FENCE
DIMPLE ARRAY



FOOTPRINT

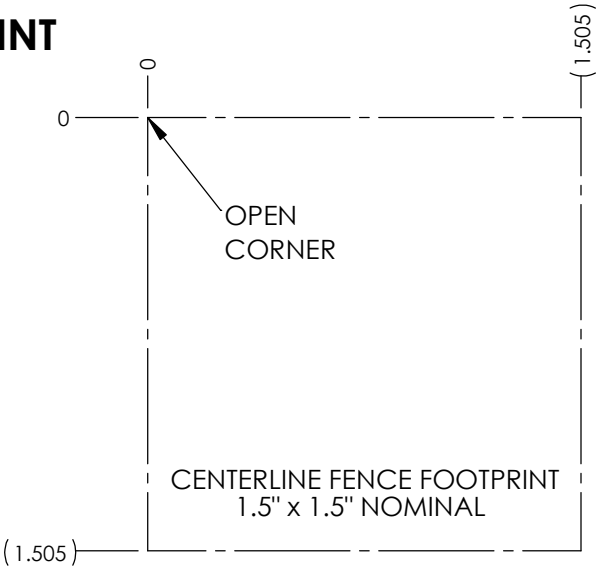

COVER

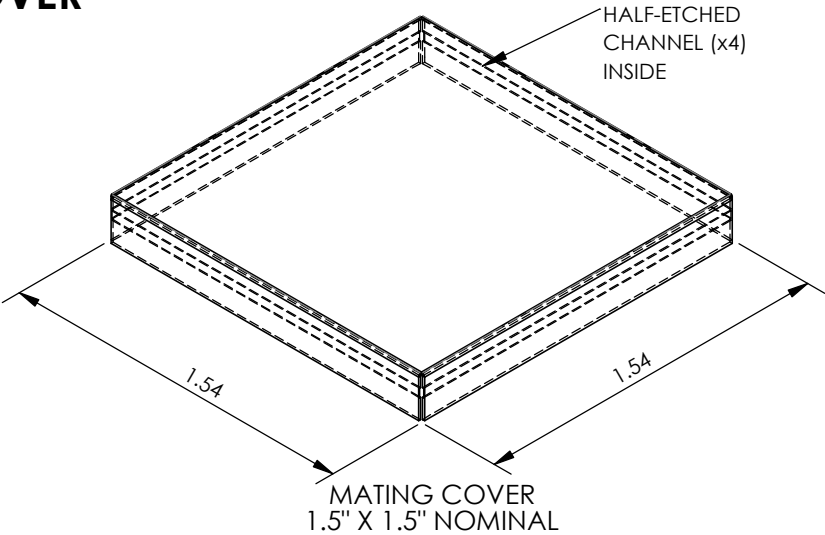

BOM	PART NO.
ASSY	GRVA-1500S1500-0250X
COVER	GRVC-1500S1500-0200X
FENCE	GRVF-0250SC-012000

FOR ANY QUESTIONS ON NON-STANDARD
GEOMETRY OPTIONS, PLEASE CONSULT THE
FACTORY AT **SALES@ORBEL.COM**

RoHS Compliant	
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	
PROPRIETARY AND CONFIDENTIAL	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ORBEL CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ORBEL CORPORATION IS PROHIBITED.	

DIMENSIONS ARE IN INCHES	
TOLERANCES:	
FRACTIONAL ±	
ANGULAR: MACH ± 3 Degrees	
TWO PLACE DECIMAL ± .010	
THREE PLACE DECIMAL ± .005	
MATERIAL:	
.010" C770 NiAg, 1/2 HARD	
HEAT TREAT:	
FINISH:	

	NAME	DATE
DRAWN	TNC	7/22/2025
CREATED		
CHECKED		
APPRVD.		
LATEST REVISION:		
CUSTOMER:		



EZ-LOC
STANDARD ASSEMBLY


SIZE A	SAMPLE DRAWING	
SCALE: 3:2	CAGE CODE: 57DU2	SHEET 1 OF 2

FENCE STRIP


(SURFACE MOUNT)

GRVF-0250SC-012000

DIM "A"	PART NO.
0.25"	GRVF-0250SC-012000
0.50"	GRVF-0500SC-012000
1.00"	GRVF-1000SC-012000

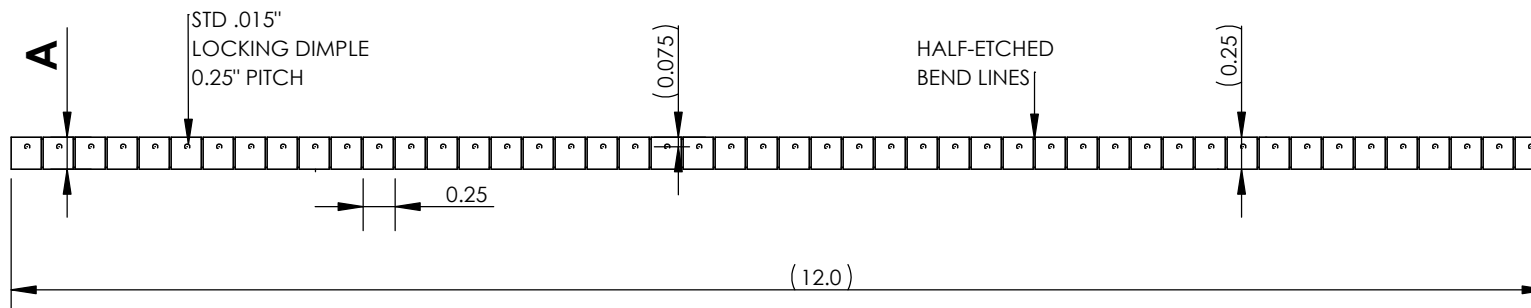

SIDE VIEW
SCALE 2 : 1




FENCE STRIP


(THROUGH-HOLE PINS)

GRVF-0250TB-012000

DIM "A"	PART NO.
0.25"	GRVF-0250TB-012000
0.50"	GRVF-0500TB-012000
1.00"	GRVF-1000TB-012000

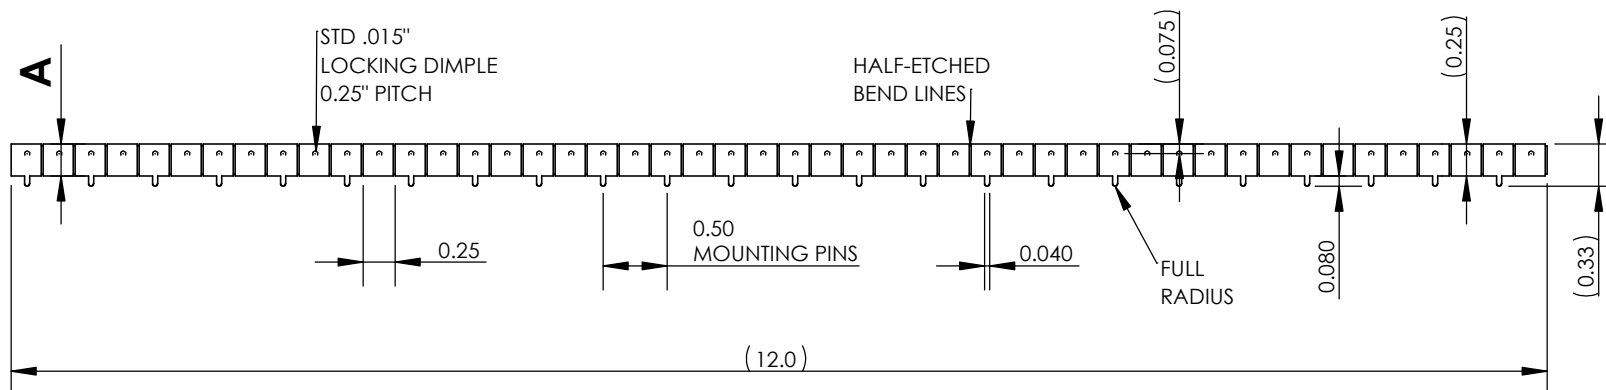


SIDE VIEW
SCALE 2 : 1



RoHS Compliant

THIRD
ANGLE
PROJECTION



DO NOT SCALE DRAWING

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ORBEL CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ORBEL CORPORATION IS PROHIBITED.

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±
ANGULAR: MACH ± 3 Degrees
TWO PLACE DECIMAL ± .010
THREE PLACE DECIMAL ± .005

MATERIAL:
.010" C770 NiAg, 1/2 HARD
HEAT TREAT:
FINISH:

	NAME	DATE
DRAWN	TNC	7/22/2025
CREATED		
CHECKED		
APPRVD.		
LATEST REVISION:		
CUSTOMER:		

ORBEL

EZ-LOC
STANDARD ASSEMBLY

SIZE
A SAMPLE DRAWING

SCALE: 2:3 CAGE CODE: 57DU2 SHEET 2 OF 2


FOR ANY QUESTIONS ON NON-STANDARD GEOMETRY OPTIONS, PLEASE CONSULT THE FACTORY AT **SALES@ORBEL.COM**

HOW TO ORDER EZ-LOC BOARD LEVEL SHIELDING

The chart below is an easy-to-use reference on how Orbel EZ-LOC BLS part numbers are created and used to order a desired shield cover size and shield fence profile. For custom configurations that fall outside of these standard options, please consult the factory.


EZ-Loc Cover

Sample Part Number: **GRVC-1500S1500-0200X**

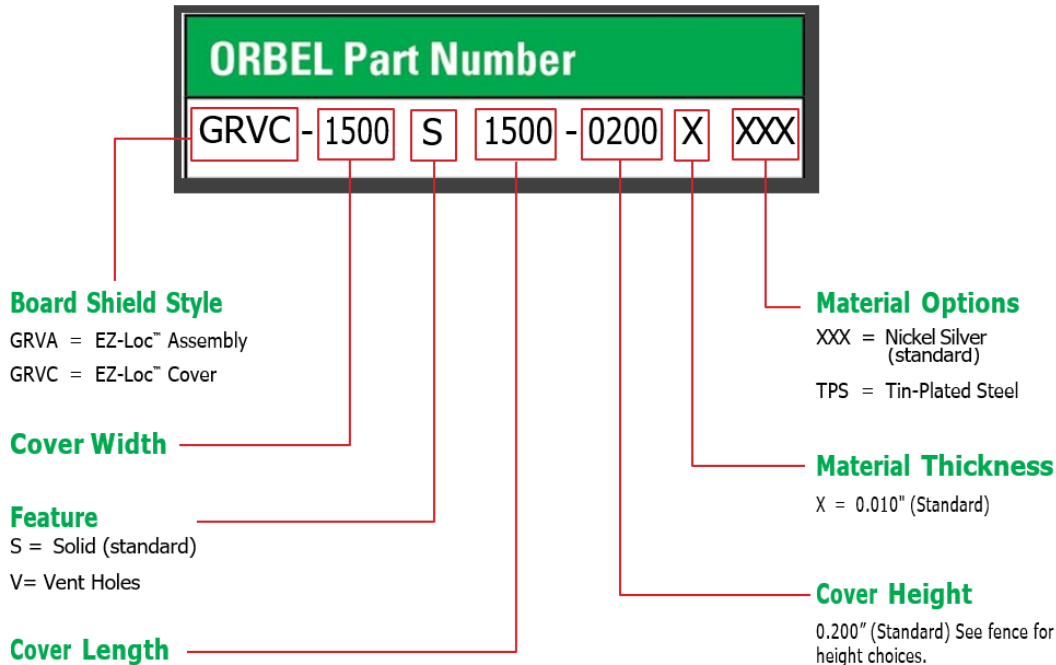

EZ-Loc Fence

Sample Part Number: **GRVF-0250SC-012000**

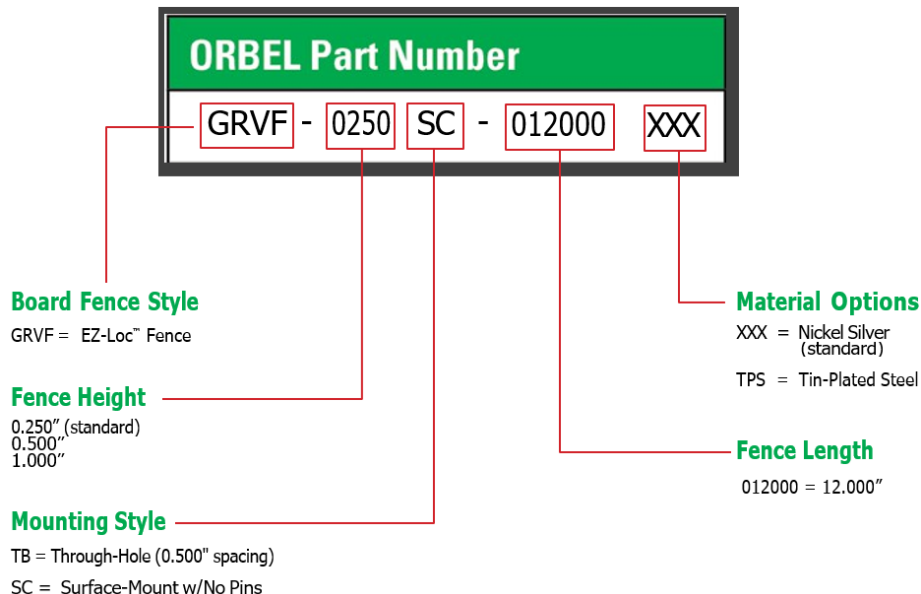

EZ-Loc

SPECIFICATIONS

- Fence Strip Length: 12"
- Bend Point Spacing: 0.25"
- Heights: 0.25", 0.5", 1"
- Std Material: 0.010" Alloy 770 Nickel Silver
- Excellent Shielding Effectiveness: up to 60dB

FEATURES

- Standard Material Nickel Silver
- Available in Tin-Plated Steel
- Bendable / Formable Fence Strips
- Dimpled Locking Mechanism on Fence
- Grooved Locking System on Cover
- Fence Mounting Options: Knife Edge or Mounting Pins
- Ability to Create Multi-Cavity Shields
- Pre-Designed Covers
- Custom Cover Options

Orbel Corporation

2 Danforth Drive, Easton PA

610-829-5000

AS9100 Rev.D/ISO 9001:2015

info@orbel.com



Orbel.com



MEET EVERY MISSION-CRITICAL CHALLENGE WITH CONFIDENCE

EZ-Loc™ Board Level Shielding *Shielding Tomorrow's Technology*

Orbel, the recognized leader in standard and custom Board Level Shielding, now offers the EZ-Loc™ EMI

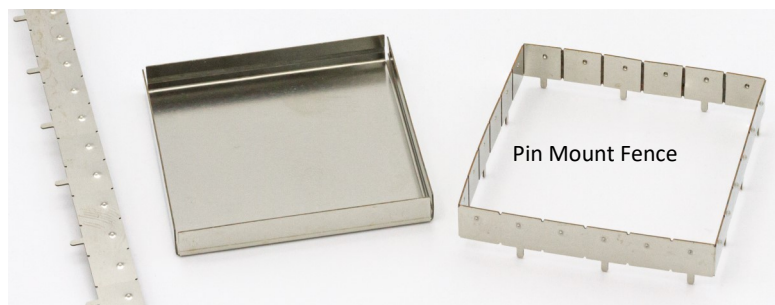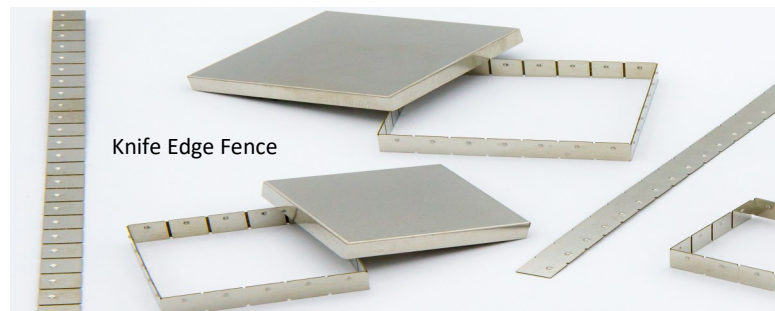

The EZ-Loc™ is an ideal way to develop your next PCB shielding requirement. The fence strips can be hand bent into any rectangular size without specialized tooling, and any remaining excess can be removed by hand. The fence comes with a mating cover made to your exact specifications ensuring a reliable fit. The EZ-Loc™ incorporates dimple features on the fence and the mating cover exhibits a matching groove for ease of installation while securely locking the cover in place.

Orbel uses a highly solderable and corrosion resistant Nickel Silver Alloy to produce the EZ-Loc™. This material choice makes the EZ-Loc™ ideal for prototyping various shield sizes and configurations, while also lending itself as a solution for shielding applications in low to medium production volumes.